



064-023-2639
Environmentally
Preferred Flooring



CLICK PRO®

TWELVE WONDERS



Collection 2024/25

Floors For Great Interior



phthalate
free



formaldehyde
free



easy
maintenance



waterproof
surface



abrasion
resistant



underfoot
comfort



slip
resistant



sound
absorption



indentation
residual



stain
resistant



fire
reaction



residential &
commercial use



termite
retardant



antimicrobial
surface

Suitable for use in places with toddler (DOTP) and elderly (R9)

Non - phthalate plasticizer Plank Size : 7" x 48" x 5 mm



SW 55122 Karst

NEW



SW 55211 Yosemite


NEW



SW 55123 Giza


Note : Miniature samples for colour illustration only

Wearlayer : 0.5 mm with antimicrobial protective coating

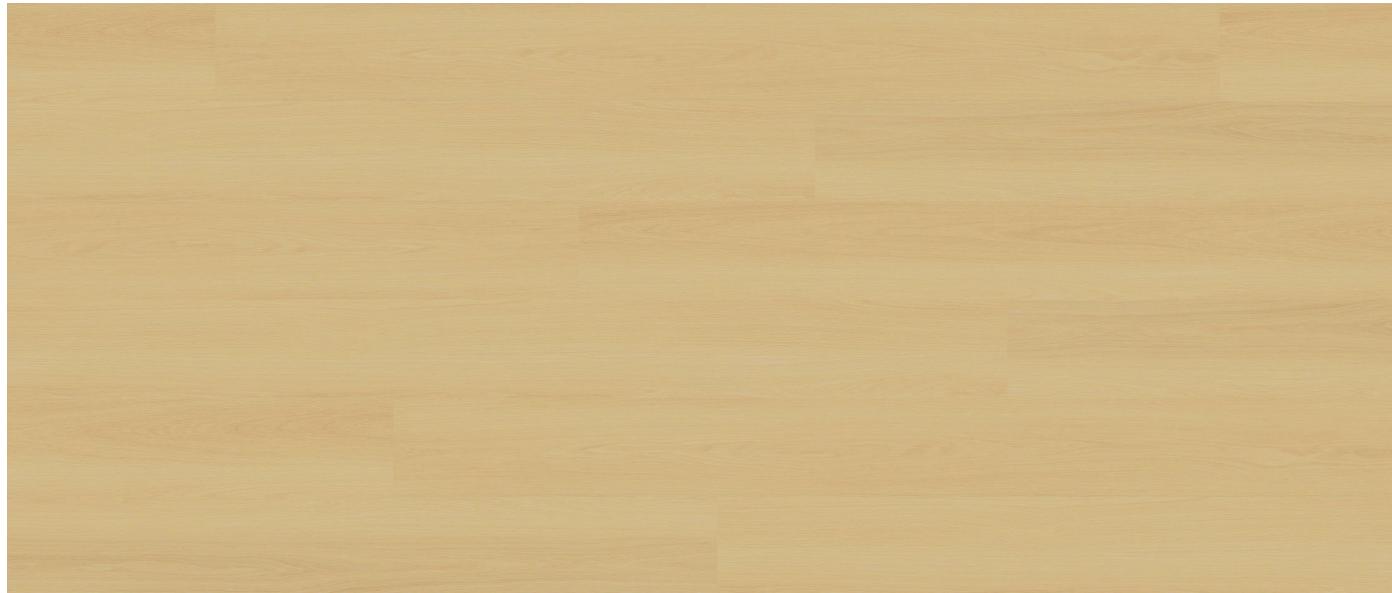


SW 55161 Sequoia

NEW

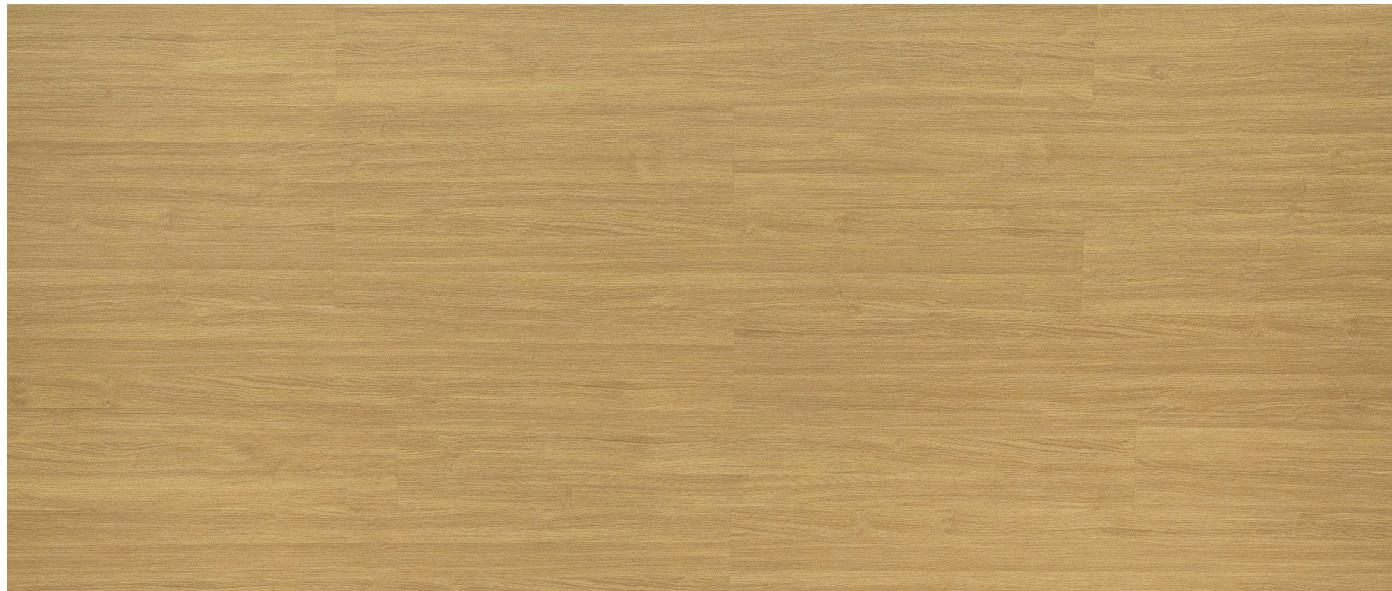

SW 55158 Castle

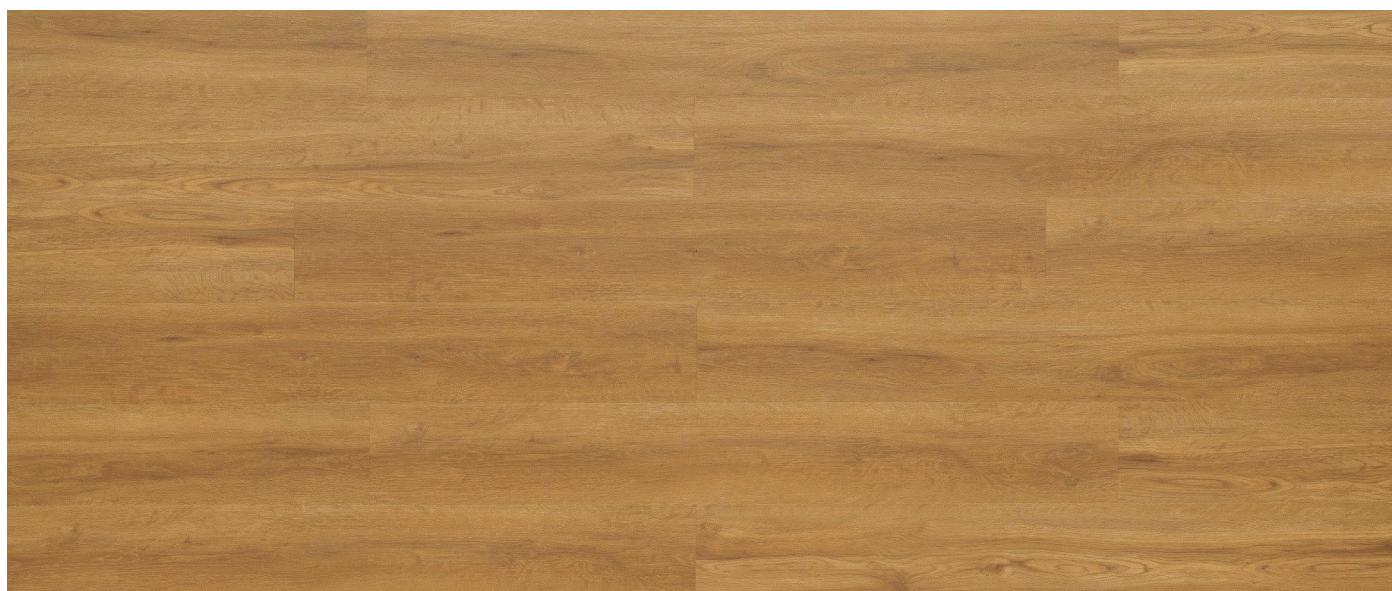

SW 55251 Castillo

Note : Miniature samples for colour illustration only

Plank Size : 178 x 1219 x 5 mm



SW 55137 Jurassic

Colour Gradation Series



SW 55126 Windsor




SW 55266 Cerrado


Note : Miniature samples for colour illustration only

NEW

Tile 12" x 24" x 5mm
Size : 305 x 610 x 5mm

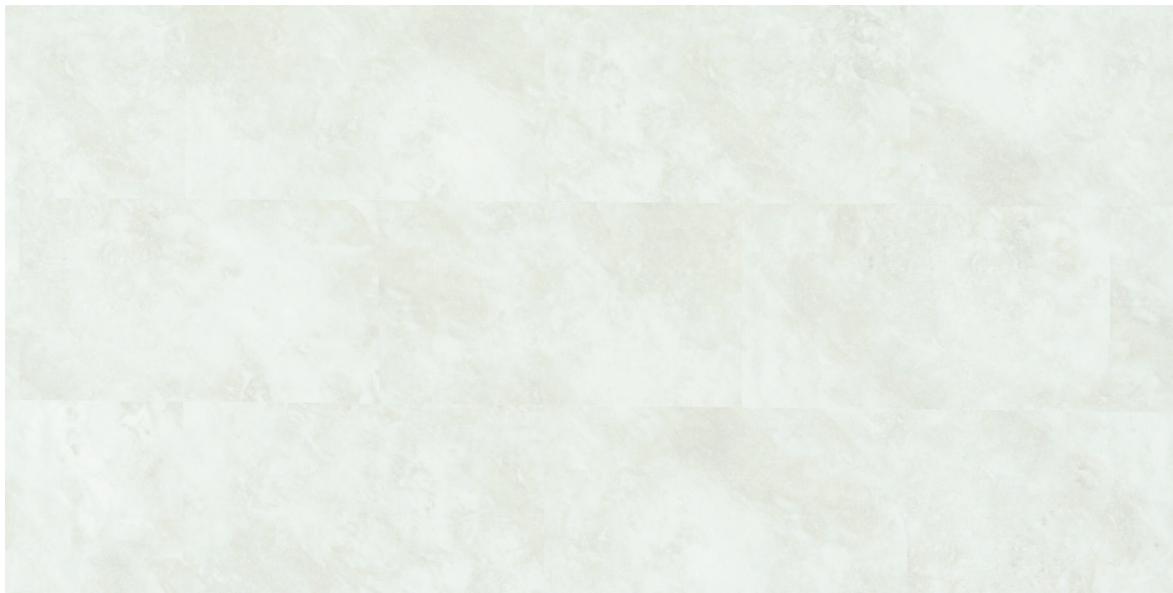


SK 3658 T Mount Everest

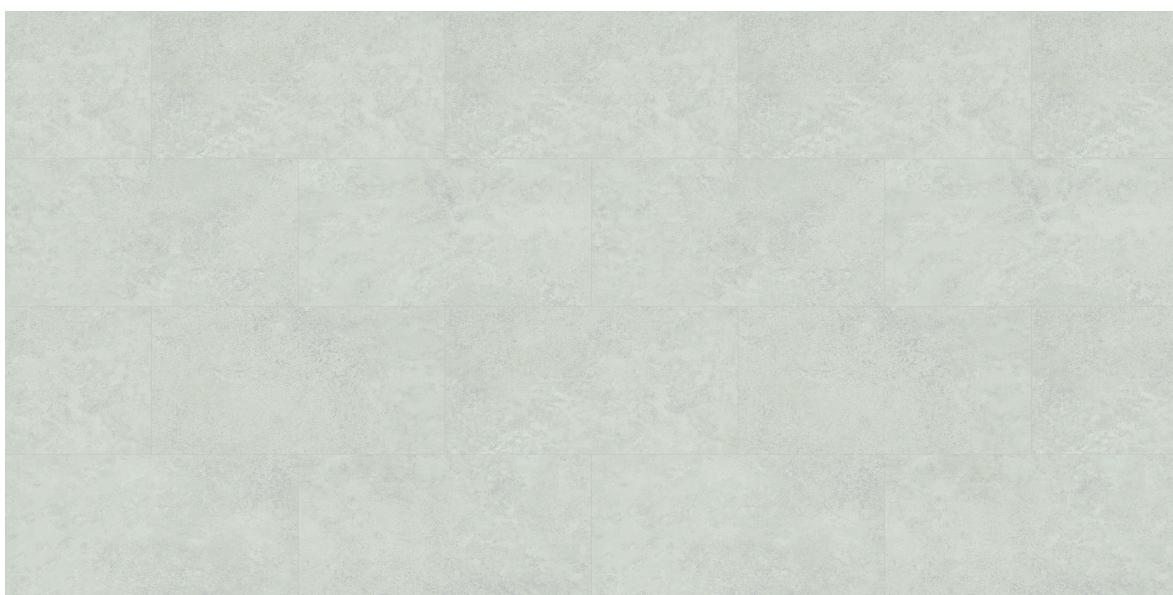

SK 3663 T Fuji

NEW

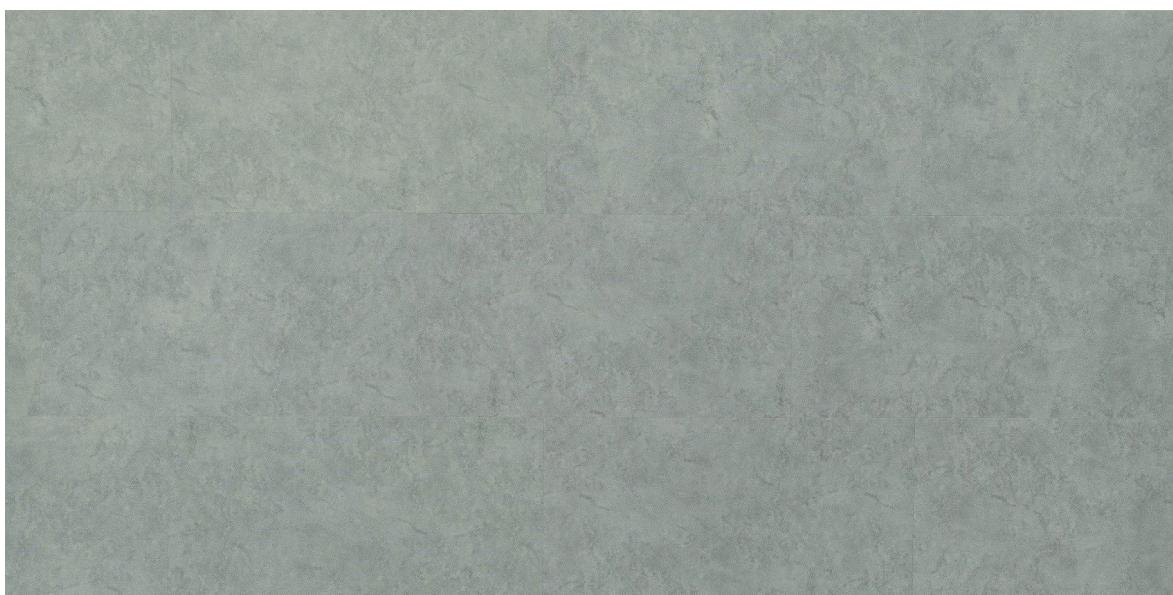

SK 3636 T Beton

Note : Miniature samples for colour illustration only



The Benefits

CLICKPRO planks and tiles are high performance floating floor made from high quality vinyl. The aesthetics of hard wood and natural stone are now combined with the resistance of pure vinyl to scratches, scuffing, stain and dirt. CLICKPRO surface is impervious to water and can be deployed in places that receive spills. With its slip resistance surface and underfoot resilience, you can enjoy walking on it barefoot. Being glueless, it is also eco friendly to install and contributes to improved indoor air quality. The aesthetics are unsurpassed with the natural wood emboss and non-repeat wood pattern at the two ends of each plank and tile. The surface is treated with antimicrobial protective coating. CLICKPRO LVT click offers superior impact sound insulation as compared to other click system such as SPC and laminated floors. With easy maintenance, CLICKPRO are floors for great interior.

Application

CLICKPRO can be installed in the residential and general commercial environment. In residential, it can be fitted in the bedroom, study, living and dining area. It can also be installed in dry kitchen and entrance of bathroom by sealing the perimeter edges with silicon caulk. It can be readily installed over existing hard surfaces and in moisture prone area where wood flooring and glue-down products are off limit. For commercial use, with its 0.5mm high performance wear layer, CLICKPRO is well suited for use in offices, care centres, retail outlets and institutions.

Installation & Care

Before install check list *Substrate must be structurally stable, flat and smooth. *Check floor level variation is <3.0mm across any 1.2 meters. *Check subfloor moisture level must be <90%RH. *Floor to be acclimatized on site 12 hours at room temperature before installing. *Height variation between ceramic tiles, plywood and any other existing flooring must be patched and levelled before laying over with new click flooring. *For areas with rolling load and high foot traffic, thicker product thickness should be used. *All carton boxes, planks and tiles must be stored completely flat on hard surface.

During install check list *For every 5 meters room length, leave a 2mm wall gap. *Leave an expansion gap every 15 meters. *All joints must be properly adjoined. *For wet area use, fill the perimeter gaps with high quality silicone caulking.

Notes to end user *Do not spread excess water such that they seep into wall gaps. *Avoid exposure to long period of peak hours direct sunlight without protection of shades. *Do not drag heavy furniture across the surface. *For the use of chair with castor wheel, a protective surface pad is recommended.

Maintenance *Floors should be swept or vacuum regularly to remove loose dirt. *Damp mop as needed using clean water and a PH neutral floor cleaner. Cleaner should be free of ammonia and hydrochloric acid. *Aging floor can be restored by machine buffing and polishing.

Product Specifications

| CLASSIFICATION | STANDARDS | | TWELVE WONDERS |
|---------------------------------|--|-------------------|--|
| Size | EN 427 | mm | Plank : 178 x 1219 mm Tile : 305 x 610 mm |
| Thickness * | EN 428 | mm | 5.0 mm (Micro-Bevelled Edge) |
| Wear layer * | EN 429 | mm | 0.50 mm |
| Curling * | EN 434 | mm | ≤2 mm |
| Packing | - | Carton | 8 planks / box (1.73m ²) 9 tiles / box (1.67m ²) |
| Dimensional stability * | EN 434 | % | X direction: ≤0.25 Y direction: ≤0.25 |
| Residual Indentation * | EN 433 | mm | ≤0.1mm |
| Effect of castor chair * | EN 425 | - | No visible damage |
| Abrasion resistance * | EN 660 | mm ³ | Wear Group T. Fv ≤ 2.0 |
| Slip resistance * | SS 485 (Dry friction test) SS 485 (Wet friction test) | - | Coefficient of friction: ≥0.4 Classification: X (35 to 44) |
| Sound insulation | ISO 10140 / ISO 717-2 | dB | △Lw = 12, Ci△ = -7 |
| Colour fastness * | ISO 105-B02 | Degree | > 6 |
| Stain resistance * | EN 423 | Index | Complied |
| Fire classification * | EN 13501-1 | Class | Bfl-S1 (flame spread / smoke) |
| Electrical propensity | EN 1815 | kV | < 2 |
| Cigarette burn resistance * | EN 1399 | Class | Class 3 |
| Classification (level of use) | EN 429 | Class | Heavy domestic (class 23) General commercial (class 32) |
| Formaldehyde emission | EN 717-1 | mg/m ² | Not detected |
| Heavy metal | EN 71 Part 3 | mg/kg | Not detected |
| Pentachlorophenol | 14041 | mg/kg | Not detected |
| Phthalate | EN 14372 : 2004 | mg/kg | Not detected |
| Antimicrobial activities | ISO 22196 ISO 846 | Bacteria Fungi | >99% reduction (ATCC 6538P / 8739) No growth observed (ATCC 6205 / 6275 / AS3.2942 / 3875 / 3984) |

* Complies with Singapore HDB Material Listing performance criteria, other test standards are additional. CLICKPRO offers a 10 years residential wear durability and 3 years commercial limited warranty against manufacturing defects. By following the installation and care, CLICKPRO will provide a beautiful and lasting floor for many years to come.