



MIPOLAM® 150

NEW



PUR PROTECT

Performances and benefits



Excellent abrasion resistance



Matt finish surface: enhanced design & colour



Available in 2 m sheet



Homogeneous vinyl flooring suitable for medium to heavy duty traffic areas



Flexible flooring, easy to install & weld



Directional design available in 22 references

FEWER VOC'S, BETTER INDOOR AIR QUALITY



COMPOSITION  
100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



WELLNESS  
Health

- Antibacterial activity (inhibits growth > 99 %)



INDOOR AIR QUALITY

- TVOC emissions 100 times lower than norm requirements (TVOC <10 µg/m³ after 28 days)
- Floorscore certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission



RECYCLABILITY

- 100 % recyclable product



RECYCLED CONTENT

- 100 % REACH compliant recycled content

INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using Gerflor® matching welding rod.

MAINTENANCE

No wax is needed right after installation. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

⚠ Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

# MIPOLAM® 150



34-43

Homogeneous Vinyl Sheet  
Size: 2 m x 20 m x 2.0 mm



1003 Beige



1013 Pepper




1007 Slate



1004 Earth



1014 Grey

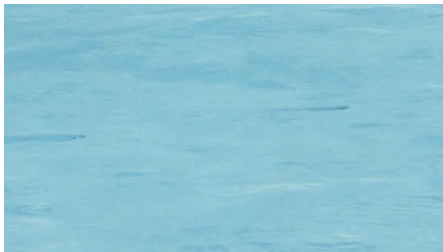

2034 Azurite




1005 Cream



2091 Concrete



2046 Cobalt

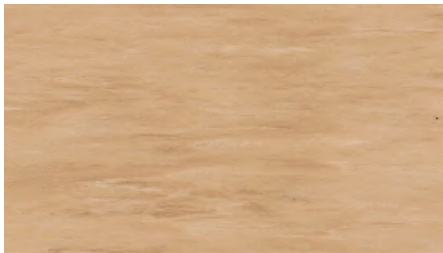

1006 Brown



2038 Clay



1010 Green



2048 Mocca



2037 Lambo



2093 Jaune

MIPOLAM® 150

DESCRIPTION

Total thickness	ISO 24346 [EN 428]	mm	2
Weight	ISO 23997 [EN 430]	g/m²	3300
Width / Length of sheet	ISO 24341 [EN 426]	cm / lm	200 / 20

CLASSIFICATION

Norm / Product specification	-	-	ISO 10581[EN 649]
European classification	ISO 10874 [EN 685]	class	23 - 31 / 34 - 43
Fire rating	EN 13 501-1	class	Bfl-s1
Static electrical propensity	EN 1815	KV	<2
Electrical resistance	EN 1081	Ω	10⁹-10¹⁰
Slip resistance dry	EN 13893	-	≥0.3
Slip resistance wet	DIN 51130	class	R9

PERFORMANCES

Wear resistance	EN 660.2	mm³	≤7.5
Wear group	EN 649	group	M
Type binder content	ISO 10581	type	II
Dimensional stability	ISO 23999 [EN 434]	%	≤ 0.4
Residual indentation	ISO 24343-1 [EN 433]	mm	≈0.05
Castor chair test	ISO 4918 [EN 425]	-	OK
Thermal conductivity	ISO 10456 [EN 12524]	W/(m.K)	≈0.25
Colour fastness	ISO 105 - B02	degree	≥ 6
Chemical products resistance	ISO 26987 [EN 423]	-	OK
Anti-bacterial and fungicidal treatment	-	-	OK
Surface treatment	-	-	PUR Protect
Color number	-	-	22

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000 - 6	µg/m³	< 10
Certification	-	-	Floorscore®

CE MARKING

CE	EN 14041	-	<div><div></div><div></div><div></div><div></div><div></div><div></div></div>
----	----------	---	---

MIPOLAM® 150 is a durable, high performing flexible homogeneous multipurpose flooring suitable for most types of heavy traffic areas. It benefits from PUR Protect surface treatment with excellent cleaning characteristics, improved resistance to scratching and scuffing. MIPOLAM® 150 is recommended for public, institutional and commercial buildings where ease of maintenance and long life under heavy traffic are required.

Gerflor Don't forget our complementary ranges!



MIPOLAM® 150, LESS SPEAKING FOR MORE ACTIONS



COMPOSITION  
100% REACH compliant  
FREE of formaldehyde  
FREE of heavy metals  
FREE of solvent



RECYCLED  
CONTENT  
100% REACH compliant  
recycled content



RECYCLABILITY  
100% recyclable  
product



INDOOR  
AIR QUALITY  
TVOC emissions between  
10 and 100 times better than  
norms requirements  
Floorscore certified  
No formaldehyde emission



INSTALLATION  
Innovative adhesive  
free installation systems



WELLNESS  
Health: Antibacterial activity  
(inhibits growth > 99%)